


Sterling OXY3 Series

Iron Reduction
System



- Reduces staining
- Eliminates odors
- Brighter laundry
- Protects plumbing
- Corrects acid water conditions

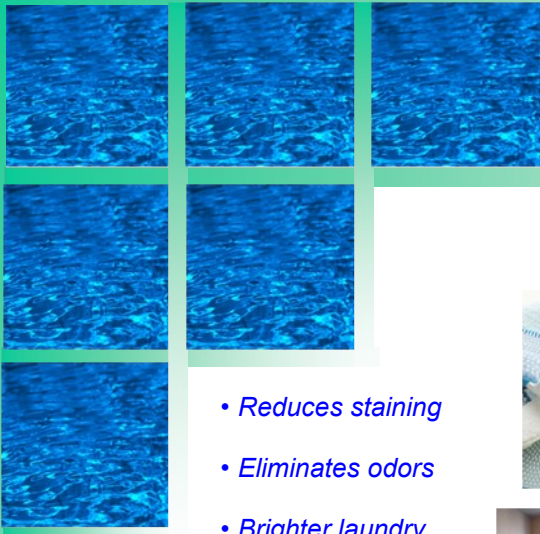

Patent Pending

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Excess Air.**
- **No Air Release Valve Required.**
- **Less Maintenance.** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.

Model Number	Backwash Rate Required @ 40 psi	Media cu. ft.	Service Flow Rate (gpm)		Dimensions W x H x D	Pipe Size
			Peak	Cont.		
OXY3-10	5 GPM	1.0	10	3	30" x 68" x 14"	1"
OXY3-20	7 GPM	2.0	13	4	34" x 58" x 15"	
OXY3-30	10 GPM	3.0	16	5	37" x 62" x 15"	

NOTE: Residential OXY3 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.)

STERLING
WATER SYSTEMS
www.sterlingwatertreatment.com

